

Bluepoint Fastening, Inc.

www.bpfasteners.com


Submittal of Wire Products 2020





ICC Evaluation Service, Inc.

- Fasteners meet ICC ESR-1530 criteria.

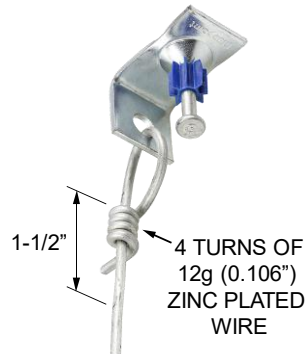

12 Gauge wire hanger wire technical data

Tensile Range	Zinc Thickness	Elongation	Yield Stress	Wire diameter	Typical capacity
75 ksi max	≥25g/m ²	26%	≥59 ksi	.106"	600 lbs

- All wires are conforming to ASTM A641-92

10 Gauge wire hanger wire technical data

Tensile Range	Zinc Thickness	Elongation	Yield Stress	Wire diameter	Typical capacity
75 ksi max	≥25g/m ²	26%	≥59 ksi	.135"	800 lbs

- All wires are conforming to ASTM A641-92

9-gauge hanger wire technical data

Tensile Range	Zinc Thickness	Elongation	Yield Stress	Wire diameter	Typical capacity
75 ksi max	≥25g/m ²	26%	≥59 ksi	.147"	1190 lbs

- All wires are conforming to ASTM A641-92

8-gauge hanger wire technical data

Tensile Range	Zinc Thickness	Elongation	Yield Stress	Wire diameter	Typical capacity
75 ksi max	≥25g/m ²	26%	≥59 ksi	.162"	1440 lbs

- All wires are conforming to ASTM A641-92