BLUEPOINT® FASTENERS

2020 2nd EDITION(1)

Manufacturer of High Quality, Innovative and Value Engineered Construction Solutions

EXCLUSIVE TO BLUE POINT FASTENERS

No Lead
Quiet

Nitro Ninja

Acoustic Solutions

Innovative

Powder Tools / Pins / Loads

Insulation Tool / Pins / Washers

Rivets / Riveters

Dump Carts

Ninja Acoustic Pole Adapter Systems

Wire Hanging Systems

Anchors / Concrete Screws



Drill Bits

Gas Tools / Gas Pins / Fuel Cell

Hooks / Accessories / Eye Lag Screws

WHO IS BLUE POINT FASTENERS?

BLUE POINT FASTENERS is an international manufacturer of high quality and innovative construction fastening solutions, hanging systems and specialty equipment. **A value engineering approach** to our innovative products allows BLUE POINT FASTENERS to be competitive while retaining high quality, contractors are looking for.

Holding numerous U.S. and International Patents, BLUE POINT FASTENERS continues to produce products that will innovate how engineers, contractors and owners can save time and money on current and future projects.

WHAT MAKES BLUE POINT DIFFERENT?

LOOK BELOW…….

- **PREMIER PRETTIED HANGING WIRE MANUFACTURER IN THE U.S. MARKET**
- **NO LEAD DIRECT FASTENING**
- **QUIET DIRECT FASTENING**
- **LOW LEAD POWDER LOADS**
- **POST TENSION AND HIGH-PRESSURE SLAB DIRECT FASTENING SOLUTIONS**
- **STEEL APPLICATIONS – BEST DRIVE PINS FOR STEEL**
- **MAGNESIUM ALLOY ACOUSTIC POLES / LARGEST SELECTION OF ADAPTERS**
- **CUSTOM ACOUSTIC HANGING SOLUTIONS**
- **LOW VOLTAGE AND DATACOM HANGING – LARGE SELECTION**
- **HEAVY DUTY DUMP CARTS – HIGHEST LOAD CAPACITY IN THE MARKET**

Specialties:

- ***Product Developing and Manufacturing***
- ***Powder Actuated, Gas and Nitrocellulose Fastening Solutions***
- ***Acoustical Hanging Solutions***
- ***Electrical and Data Comm Hanging Solutions***
- ***Concrete/Steel Fastening and Drilling Solutions***
- ***Jobsite Equipment and Tools***

BLUEPOINT FASTENERS

Table Of Contents

POWDER ACTUATED TOOLS (PAT) 2-4

POWDER LOADS 5

DRIVE PINS 6-10

GAS TOOLS/ GAS PINS/ FUEL CELL 11

NITRO NINJA 12-13

BP-27C POWDER ACTUATED TOOL 14

NINJA CEILING TOOL SYSTEM 15


NINJA ACOUSTIC POLE ADAPTER SYSTEMS 16-17

RIVETS/ RIVETERS 18

INSULATION TOOL/ PINS/ WASHERS 19

WIRE HANGING SYSTEMS 20-21

TOGGLE BOLTS/ SCREWS 22

HOOKS/ HANGERS 23-26

J HOOKS 24

ANCHORS/ CONCRETE SCREWS 27-28

DRILL BITS 29-30

DUMP CARTS 31

BP-361 .27cal Powder Actuated Tool

Technical Data

Dimensions:	16-1/8" x 2-1/8" x 6.1/2"
Weight:	5.0lb
Fastener Type:	Flat & dome head pins or threaded studs
Fastener length:	1/2" - 1-7/8"
Load Type:	.27cal. (6.8 x 11mm) strip loads
Power Level:	Green/3, Yellow/4, Red/5

Applications and Advantages

- Commercial and residential construction
- Drywall track
- Conduit clips fastening
- Electrical fixtures
- Duct straps
- Wood to steel
- Wood to concrete
- Metal track
- Concrete forming
- Door frames
- Perimeter plates
- Furring Channel
- Brick Ties
- Automatic piston return and powder loads advance
- Variable level adjustment
- Reduces noise level

BP-361M Tool w/ Magazine

Technical Data

Dimensions:	16-1/4" x 2-1/8" x 8-3/4"
Weight:	5.4lb (with magazine)
Fastener Type:	Flat and dome collated pins
Fastener length:	1/2" - 1-1/4"
Load Type:	.27cal. (6.8 x 11mm) strip loads
Power Level:	Green/3, Yellow/4, Red/5

Applications and Advantage

- Commercial and residential construction
- Drywall track
- Electrical fixtures
- Duct straps
- Wood to steel
- Wood to concrete
- Metal track
- Concrete forming
- Door forming
- Perimeter plates
- Furring channel
- Brickties
- Automatic piston return
- Automatic pins and powder loads advance
- Variable level adjustment
- Reduces noise level

BP-307S .22cal Powder Actuated Tool

The BP307S is a Low Velocity Powder Actuated, single shot, .22 caliber tool which can be used to install .300"-.315" head drive pins and 1/4"-20 threaded studs, up to 3" in total length. The BP307S is designed for maintenance, residential and commercial contractors.

Applications

- Conduit Clips to Concrete and Steel
- Drywall Track to Concrete and Steel
- Electrical Fixtures to Concrete and Steel
- Wood Furring Strips to Concrete
- Wood Perimeter Plates to Concrete
- Wood Framing Plates to Steel
- Hooks, Hangers and Cable ties to Concrete and Steel

Advantages

- Light Weight Durable Design
- Rubber Cushion Comfort Grip
- Automatic Cartridge Ejection
- Slim Profile Nose Piece 5/8" Diameter able to access tight areas
- Simple to Clean and Maintain – Service in the Field
- Replaceable Piston Buffer for Overdrive Protection
- Replaceable Piston and Piston Stop Guide
- Meets or Exceeds OSHA/ANSI A 10.3 Safety Standards
- Meets or Exceeds PATMI Standards
- Built in overdrive precision

Technical Data

Weight: 4.2 lbs
Length: 13.75"

Powder Loads

.22cal neck down single shot loads		
Brown	Green	Yellow

.145" Diameter Shank Series Drive Pins:

PD Pins:

Model No.	Shank Length	Description	Package/Qty
PD13PK	1/2" Knurled	**.300"** head dia. pin w/plastic washer	100/1000/5000
PD16F10K	5/8" Knurled	**.300"** head dia. pin w/flute	100/1000/5000
PD19F10	3/4"		100/1000/5000
PD19F10BLB	3/4"	**.300"** head dia. track pin(Pinch point, black)	1000/5000
PD25F10	1"	**.300"** head dia. pin w/flute	100/1000/5000
PD32F10	1-1/4"		100/1000
PD38F10	1-1/2"		100/1000
PD42F10	1-5/8"		100/1000
PD44F10	1-3/4"		100/1000
PD47F10	1-7/8"		100/1000
PD51F10	51mm/ 2"		100/1000
PD57F10	2-1/4"		100/1000
PD63F10	2-1/2"		100/1000
PD76F10	3"		100/1000

Top Hats Pins:

PDTH13F10K	1/2" knurled	**.300"** head dia. pin w/ top hat	100/1000/5000
PDTH16F10K	5/8" knurled		100/1000/5000
PDTH19F10	3/4"		100/1000/5000
PDTH25F10	1"		100/1000/5000
PDTH32F10	1- 1/4"		100/1000

Washer Pins:

PDW25-19F10	3/4"	**.300"** dia. head pin w/1" dia. metal washer	100/1000
PDW25-25F10	1"		100/1000
PDW25-32F10	1-1/4"		100/1000
PDW25-38F10	1-1/2"		100/1000
PDW25-51F10	2"		100/1000
PDW25-63F10	2-1/2"		100/1000
PDW25-73F10	2-7/8"		100/1000
PDW25-76F10	3"		100/1000
PDW22-19F10	3/4"	**.300"** dia. head pin w/7/8" dia. metal washer	100/1000
PDW22-25F10	1"		100/1000
PDW22-32F10	1-1/4"		100/1000
PDW19-19F10	3/4"	**.300"** dia. head pin w/3/4" dia. metal washer	100/1000
PDW19-25F10	1"		100/1000
PDW19-32F10	1-1/4"		100/1000
PDW19-38F10	1-1/2"		100/1000
PDW19-51F10	2"		100/1000
PDW19-63F10	2-1/2"		100/1000
PDW19-76F10	3"		100/1000

.157" Diameter Shank Series Drive Pins:

PD Pins:

Model No.	Shank Length	Description	Package/Qty
PD157-12PK	1/2"	**.300"** head dia. knurled pin w/ plastic washer	100/1000/5000
PD157-58F	5/8"	**.300"** head dia. pin w/ rubber flute	100/1000/5000
PD157-34F	3/4"		100/1000/5000
PD157-34FB	3/4", bulk		1000/5000
PD157-78F	7/8"		100/1000/5000
PD157-100F	1"		100/1000
PD157-114F	1-1/4"		100/1000
PD157-112F	1-1/2"		100/1000
PD157-158F	1-5/8"		100/1000
PD157-134F	1-3/4"		100/1000
PD157-178F	1-7/8"		100/1000
PD157-200F	2"		100/1000
PD157-214F	2-1/4"		100/1000
PD157-212F	2-1/2"		100/1000
PD157-300F	3"		100/1000

Top Hats Pins:

PD157-78FTH	7/8"	**.300"** head dia. top hat pin	100/1000/5000

Washer Pins:

PD157-114W	1-1/4"	**.300"** dia. head pin w/1" dia. metal washer	100/1000
PD157-112W	1-1/2"		100/1000
PD157-212W	2-1/2"		100/1000
PD157-300W	3"		100/1000

Actual Embedment Pins

New

PD157-12PKAE	1/2"	**.315"** head slim groove shank AE pin w/ plastic washer	100/1000/5000
PD157-34AE	3/4"	**.315"** head dia. AE pin w/ rubber flute	100/1000/5000
PD157-100AE	1"		100/1000
PD157-114AE	1-1/4"		100/1000
PD157-112AE	1-1/2"		100/1000

BP-303A .27cal Powder Actuated Tool

Technical Data

Weight: 5 lbs Length: 14"
Pin Type: .300" /.315" /8mm head pin, 1/4" - 20 threaded stud
Pin Length: 1/2" to 3" total length
Load Type: .27cal. (6.8 x 11mm) 10 load strip, semi automatic load adjuster
Power Level: Green, Yellow, Red, Purple

Advantages:
- Adjustable power levels
- Shoots up to full 3" pins
- High strength durable piston
- Protective rubber front barrel sleeve for user protection

Applications:
- Concrete forming
- Wood to concrete/steel
- Electrical fixture to concrete/ steel
- Conduit clip to concrete
- Commercial & residential construction

Suitable Base Materials:
- Normal-weight concrete
- Concrete masonry
- Steel

BP-301C .27cal Powder Actuated Tool

Technical Data

Weight: 5 lbs Length: 13-5/8"
Pin Type: .300" /.315" /8mm head pin, 1/4" - 20 threaded stud
Pin Length: 1/2" to 2-1/2" total length
Load Type: .27cal. (6.8 x 11mm) 10 load strip, semi automatic load adjuster
Power Level: Green, Yellow, Red, Purple

Applications:
- Concrete forming
- Wood to concrete/steel
- Electrical fixture to concrete/ steel
- Conduit clip to concrete
- Commercial & residential construction

Suitable Base Materials:
- Normal-weight concrete
- Concrete masonry
- Steel

▲ BP-35 .25cal Powder Actuated Tool

Technical Data

Weight: 4.3 lbs **Length:** 11.42"
Pin Type: .300" /.315" /8mm head pin, 1/4" - 20 threaded stud
Pin Length: 1/2" to 1-1/2" total length
Load Type: .25cal. 10 load strip, semi automatic load adjuster
Power Level: Green, Yellow, Red

Applications:
- Track to floor
- Wood to concrete/steel
- Electrical fixture to concrete/ steel
- Conduit clip to concrete
- Commercial construction
- Reliable & compact for short pin applications

Suitable Base Materials:
- Normal-weight concrete
- Concrete masonry
- Steel

BP-307 .22cal Powder Actuated Tool

Technical Data

Weight: 4 lbs Length: 13.19"
Pin Type: .300" /.315" /8mm head pin, 1/4" - 20 threaded stud
Pin Length: 1/2" to 3" total length
Load Type: .22cal. neck down load
Power Level: Brown, Green, Yellow, Red

Applications:
- Track to floor
- Wood to concrete/steel
- Electrical fixture to concrete/ steel
- Conduit clip to concrete
- Commercial & residential construction

Suitable Base Materials:
- Normal-weight concrete
- Concrete masonry
- Steel

▲ **Available on Request**

*Enhanced strips are good for heavy duty and full automatic fastening tools

	Model No.	Package/Qty	Size	Description	Color	Power	Power Level
	27ES11L6	100 10000	6.8 x 11 (mm)	.27cal Enhanced strip loads	Purple	Strongest	6
	27ES11L5	100 10000			Red	Strong	5
	27LS11L5	100 10000	6.8 x 11 (mm)	.27cal long strip loads	Red	Strong	5
	27LS11L4	100 10000			Yellow	Medium	4
	27LS11L3	100 10000			Green	Low	3
	27LS11L2	100 10000			Brown	Lowest	2
	25SS10L5	100 10000	6.3 x 10 (mm)	.25cal strip loads	Red	Strong	5
	25SS10L4	100 10000			Yellow	Medium	4
	25SS10L3	100 10000			Green	Low	3
▲	25SS10L2	100 10000			Brown	Lowest	2
▲	25MD10L5	100 10000	6.3 x 10 (mm)	.25cal metal disc loads	Red	Strong	5
▲	25MD10L4	100 10000			Yellow	Medium	4
▲	25MD10L3	100 10000			Green	Low	3
▲	25MD10L2	100 10000			Brown	Lowest	2
	22SGNDL5	100 10000	5.6 x 16 (mm)	.22cal neck down single shot loads	Red	Strongest	5
	22SGNDL4	100 10000			Yellow	Strong	4
	22SGNDL3	100 10000			Green	Medium	3
	22SGNDL2	100 10000			Brown	Low	2
▲	22SGNDL1	100 10000			Gray	Lowest	1
	22L4B	100 10000		.22cal neck down single shot loads, brass case	Yellow	Strong	4
	22SGSWL6	100 10000	5.6 x 15 (mm)	.22cal straight wall single shot loads	Purple	Strong	6
▲	22SGSWL5	100 10000			Red	Medium	5
▲	22SGSWL4	100 10000			Yellow	Low	4
▲	22SGSWL3	100 10000			Green	Lowest	3
	22SL6B	100 10000	5.6 x 15 (mm)	.22cal straight wall single shot loads, Brass casing for Ninja tool	Purple	Strong	6
	22SL5B	100 10000			Red	Medium	5
	22SL4B	100 10000			Yellow	Low	4
	22SL3B	100 10000			Green	Lowest	3
▲	27SGL3LB		6.8 x 18 (mm)	.27cal (6.8*18) single shot long loads, brass case	Green	Lowest	3
▲	27SGL4LB				Yellow	Low	4
▲	27SGL5LB				Red	Medium	5
▲	27SGL6LB				Purple	Strong	6

▲ **Available on Request**

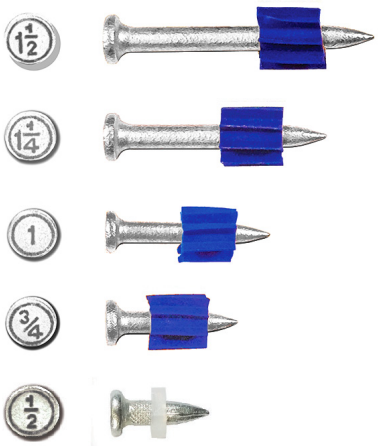

Advantages

- The Blue Point .157" diameter shank Actual Embedment (AE) pin is sized to provide actual embedment depths in track or clips up to 14 gauge (2mm).
- Assured to meet the required embedment depths into concrete or steel without compensating for the track or clip thickness.
- The pin heads are stamped for easy identification before and after installation.
- Choose the correct pins confidently
- For example, using the 1" AE pin, the actual embedment depth into the concrete is 1 ". There is no longer a need to use a 1-1/4" pin to assure a 1" embedment.
- Nominal .315" head diameter, thick heavy duty head provide true guidance for better drivability.
- Available in single shot and strip pin applications

Single Drive Pins

	Item No.	Shank Length	Description	Package/ Qty
▲	PD157-12PKAE	1/2"	**.315"** head, **.157"** dia. shank knurled AE pin w/ plastic washer	100/1000/5000
	PD157-34AE	3/4"	**.315"** head dia., **.157"** dia. shank AE pin w/ rubber flute	100/1000/5000
▲	PD157-100AE	1"		100/1000
▲	PD157-114AE	1-1/4"		100/1000
▲	PD157-112AE	1-1/2"		100/1000

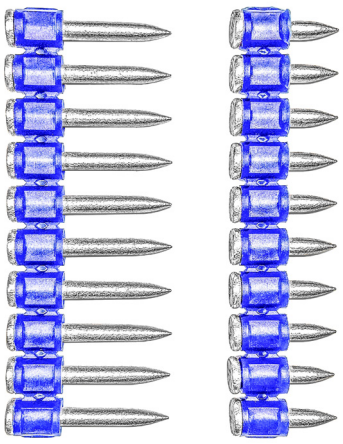

Strip Drive Pins

	Item No.	Shank Length	Description	Package/ Qty
▲	PDC157-12KAE	1/2"	**.315"** head, **.157"** dia. shank knurled AE pin w/ plastic strip	100/1000/5000
▲	PDC157-34AE	3/4"	**.315"** head dia., **.157"** dia. shank AE pin w/ plastic strip	100/1000/5000
▲	PDC157-100AE	1"		100/1000
▲	PDC157-114AE	1-1/4"		100/1000
▲	PDC157-112AE	1-1/2"		100/1000

▲ **Available on Request**

*.315" Dia. Head, .157" dia. Shank Premium Steel Pin

Item No.	Shank Length	Description	Box	Case	Master Box
PP58SG	5/8"	Slim groove shank with plastic washer	100	1000	5000

.300" Dia. Head, .157" Dia. Shank Drive Pins

Plain Pins:

Item No.	Shank Length	Description	Box	Case	Master Box
PD157-12PK	1/2"	Knurled Shank with plastic washer	100	1000	5000
PD157-58PK	5/8"		100	1000	5000
PD157-58F	5/8"	Smooth shank with rubber flute	100	1000	5000
PD157-34F	3/4"		100	1000	5000
PD157-34FB	3/4"	Smooth shank with rubber flute/bulk	-	1000	5000
PD157-78F	7/8"	Smooth shank with rubber flute	100	1000	5000
PD157-100F	1"		100	-	1000
PD157-114F	1-1/4"		100	-	1000
PD157-112F	1-1/2"		100	-	1000
PD157-158F	1-5/8"		100	-	1000
PD157-134F	1-3/4"		100	-	1000
PD157-178F	1-7/8"		100	-	1000
PD157-200F	2"		100	-	1000
PD157-214F	2-1/4"		100	-	1000
PD157-212F	2-1/2"		100	-	1000
PD157-300F	3"		100	-	1000

▲ Collated Drive Pins:

Item No.	Shank Length	Description	Box	Case
PDC157-12K	1/2"	Knurled shank with plastic strip	100	1000
PDC157-34K	3/4"		100	1000
PDC157-34	3/4"	Smooth shank with plastic strip	100	1000
PDC157-78	7/8"		100	1000
PDC157-100	1"		100	1000
PDC157-114	1-1/4"		100	1000
PDC157-112	1-1/2"		100	1000
PDC157-200	2"		100	1000
PDC157-212	2-1/2"		100	1000
PDC157-278	2-7/8"		100	1000

▲ Top Hat Pins:

Item No.	Shank Length	Description	Box	Case
PD157-78FTH	7/8"	Smooth shank with top hat	100	1000

Washer Pins:

Item No.	Shank Length	Description	Box	Case
PD157-114W	1-1/4"	With 1" dia. metal round washer	100	1000
PD157-112W	1-1/2"		100	1000
PD157-212W	2-1/2"		100	1000
PD157-300W	3"		100	1000



Item No.	Shank Length	Description	Box	Case
PD157-100C90	1"	With 90° angle clip	100	1000
PD157-100C90B			-	1000
PD157-114C90	1-1/4"		100	1000
PD157-114C90B			-	1000
PD157-100C120	1"	With 120° angle clip	100	1000
PD157-100C120B			-	1000
PD157-114C120	1-1/4"		100	1000
PD157-114C120B			-	1000
PD157-78THC90	7/8"	With Top hat and 90° angle clip	100	1000
PD157-78THC90B			-	1000
PD157-78HNC	7/8"	With Top hat and Ninja Clip	100	1000
PD157-100HNC	1"		100	1000
PD157-114HNC	1-1/4"		100	1000

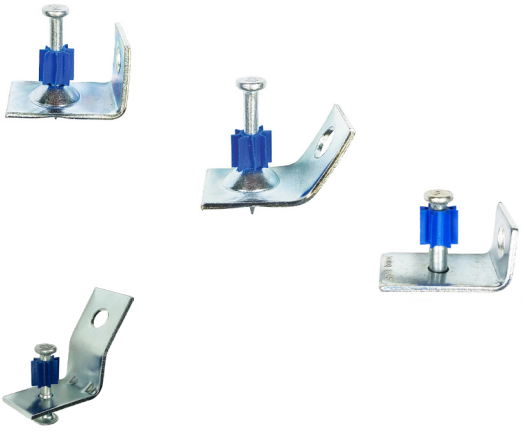

▲ **Available on Request**

.300" Dia. Head, .145" Dia. Shank Drive Pins

Plain Pins:

Item No.	Shank Length	Description	Box	Case	Master Box
PD13F10K	1/2"	Knurled shank with flute	100	1000	5000
PD13PK	1/2"	Knurled shank with plastice washer	100	1000	5000
PD16F10K	5/8"	Knurled shank with flute	100	1000	5000
PD19F10	3/4"	Smooth shank with flute	100	1000	1000
PD19FBLB	3/4"	Track pin (black) with flute/ bulk	-	1000	5000
PD19PFBLB	3/4"	Pinch point track pin (black)/ bulk	-	1000	5000
PD22F10	7/8"	Smooth shank with flute	100	1000	5000
PD25F10	1"		100	1000	5000
PD32F10	1-1/4"		100	-	1000
PD38F10	1-1/2"		100	-	1000
PD44F10	1-3/4"		100	-	1000
PD47F10	1-7/8"		100	-	1000
PD51F10	2"		100	-	1000
PD57F10	2-1/4"		100	-	1000
PD63F10	2-1/2"		100	-	1000
PD76F10	3"		100	-	1000

▲ Collated Drive Pins:

Item No.	Shank Length	Description	Box	Case
PDC13K	1/2"	Knurled shank with plastic strip	100	1000
PDC19K	3/4"		100	1000
PDC19BLB	3/4"	Track pin (black) with plastic strip/bulk	-	1000
PDC19	3/4"	Smooth shank with plastic strip	100	1000
PDC22	7/8"		100	1000
PDC27	1"		100	1000
PDC32	1-1/4"		100	1000
PDC37	1-1/2"		100	1000
PDC52	2"		100	1000
PDC62	2-1/2"		100	1000
PDC72	2-7/8"		100	1000

Washer Pins:

Item No.	Shank Length	Description	Box	Case
PDW19-19F10	3/4"	With 3/4" diameter metal round washer	100	1000
PDW19-25F10	1"		100	1000
PDW25-19F10	3/4"	With 1" diameter metal round washer	100	1000
PDW25-25F10	1"		100	1000
PDW25-32F10	1-1/4"		100	1000
PDW25-38F10	1-1/2"		100	1000
PDW25-51F10	2"		100	1000
PDW25-63F10	2-1/2"		100	1000
PDW25-76F10	3"		100	1000
PDSW28-76F10	3"	With 28mm dia. square metal washer	100	1000

Top Hat Pins:

Item No.	Shank Length	Description	Box	Case	Case
PDTH13F10K	1/2"	Knurled shank with flute	100	1000	5000
▲ PDTH16F10K	5/8"		100	1000	5000
▲ PDTH19F10	3/4"	Smooth shank with flute	100	1000	5000
▲ PDTH25F10	1"		100	-	1000

Angle Clip Pins:

Item No.	Shank Length	Description	Box	Case
PDAC120-25F10	1"	With 125° angle clip	100	1000
PDAC120-25F10B		With 125° angle clip/Bulk	-	1000
PDAC120-32F10	1-1/4"	With 125° angle clip	100	1000
PDAC120-32F10B		With 125° angle clip/Bulk	-	1000
PDAC90-25F10	1"	With 90° angle clip	100	1000
PDAC90-25F10B		With 90° angle clip/Bulk	-	1000
PDAC90-32F10	1-1/4"	With 90° angle clip	100	1000
PDAC90-32F10B		With 90° angle clip/Bulk	-	1000
PDAC90-38F10	1-1/2"	With 90° angle clip	100	1000
PDACTH90-22F10	7/8"	With Top hat and 90° angle clip	100	1000
PDACTH90-22F10B		With Top hat and 90° angle clip/bluk	-	1000

▲ **Available on Request**

.300" Dia. Head, .145" Dia. pin w/ Conduit Clip

Conduit Clip Pins:

Item No.	Shank Length	Description	Box	Case
CC25-P25	1"	With 1/4" conduit clip	100	1000
CC38-P25	1"	With 3/8" conduit clip	100	1000
CC50-P25	1"	With 1/2" conduit clip	100	1000
CC50-P32	1-1/4"		100	1000
CC75-P25	1"	With 3/4" conduit clip	50	500
CC75-P32	1-1/4"		50	500
CC100-P25	1"	With 1" conduit clip	50	500
CC100-P32	1-1/4"		50	500

8mm Head, .145 Shank Drive Pins

Plain Pins:

Item No.	Shank Length	Description	Box	Case	Master Box
DN13P8K	1/2"	Kurled shank with plastic washer	100	1000	5000
DN16P8K	5/8"		100	1000	5000
DN19P8K	3/4"		100	1000	5000
DN22P8	7/8"	With plastic washer	100	1000	5000
DN27P8	1"		100	1000	5000
DN32P8	1-1/4"		100	1000	5000
DN37P8	1-1/2"		100	1000	5000
DN52P8	2"		100	1000	5000
DN62P8	2-1/2"		100	1000	5000
DN72P8	2-7/8"		100	1000	5000

Top Hat Pins:

Item No.	Shank Length	Description	Box	Case	Master Box
DNTH16P8K	5/8"	Knurled shank with plastic washer	100	1000	5000
DNTH22P8	7/8"	With plastic washer	100	1000	5000
DNTH25P8	1"		100	1000	5000

Collated Drive Pins:

Item No.	Shank Length	Description	Box	Case
DNC13K	1/2"	Knurled shank with plastic strip	100	1000
DNC19K	3/4"		100	1000
DNC19	3/4"	Smooth shank with plastic strip	100	1000
DNC22	7/8"		100	1000
DNC27	1"		100	1000
DNC32	1-1/4"		100	1000
DNC37	1-1/2"		100	1000
DNC52	2"		100	1000
DNC62	2-1/2"		100	1000
DNC72	2-7/8"		100	1000

Angle Clip Pins:

Item No.	Shank Length	Description	Box	Case
DNACTH90-27P8	1"	With Top hat and 90° angle clip	100	1000
DNACTH90-32P8	1-1/4"	With Top hat and 90° angle clip	100	1000



Threaded Studs

1/4"-20 threaded studs:

Item No.	Thread Length	Shank Length	Description	Box	Case
M1/4-19-13D12K	3/4"	1/2"	With **1/2"** plastic and metal washer	100	1000
M1/4-19-25D12		1"		100	1000
M1/4-19-32D12		1-1/4"		100	1000
M1/4PH-13-13F10	1/2"	1/2"	With **.300"** thread cap and rubber flute	100	1000
M1/4PH-13-25F10		1"		100	1000
M1/4PH-19-13F10K	3/4"	1/2"		100	1000
M1/4PH-19-25F10		1"		100	1000
M1/4PH-19-32F10		1-1/4"		100	1000



3/8" - 16 Threaded Studs:

Item No.	Thread Length	Shank Length	Description	Box	Case
M3/8-32-16F10K	1-1/4"	5/8"k	With rubber flute	100	1000
M3/8-32-19F10K		3/4"k		100	1000
M3/8-32-25F10		1"		100	1000
M3/8-32-32F10		1-1/4"		100	1000

Other Drive Pins

5.7mm Dia. Head, .145" Dia. Shank Drive Pins:

Item No.	Shank Length	Description	Box	Case	Master Box
NK16W12K	5/8"	With **1/2"** metal washer	100	1000	5000
NK19W12K	3/4"		100	1000	5000
NK22W12K	7/8"		100	1000	5000
NK27W12	1"		100	1000	5000
NK32W12	1-1/4"		100	-	1000
NK37W12	1-1/2"		100	-	1000
NK42W12	1-5/8"		100	-	1000
NK52W12	2"		100	-	1000
NK57W12	2-1/4"		100	-	1000
NK72W12	2-7/8"		100	-	1000

Timber Clip Pin:

Item No.	Shank Length	Description	Box	Case
TBC250	2-1/2"	**.312"** Diameter Head, **.172"** diameter shank timber pin with **125°** angle clip	100	1000

	Item No.	Description
	GT-100	Gas fastening tool
	The BP Gas Tool takes up to **1-1/2"** pins and the fuel cell compatible with **Powers®, Ramset®, Simpson®**. Easy to operate and no special Licensing is required.	

Features

- Fast: **40**-pin magazine and **1,200**-shot fuel cell for reduced loading time
- Easy to use: Automatic piston reset
- Easy open jam release door
- Portable: No hoses, cords, or external energy source required
- Convenient: Simple 2-step pin loading and open-blade guide-jam release
- Easy-load fuel compartment
- No possibility of firing with no pins – when tool is down to last 2 pins in the pin magazine a "lock off" occurs
- Ladder hook

Applications

- Acoustical
- Drywall
- Electrical
- Data Com
- General Purpose
- Framing
- Mechanical
- Residential

Tool Specs

Tool dimensions: Length: **15"**, Width: **4.2"**

- Height: **14"**
- Weight: **7.4** lbs
- Magazine capacity: **30**
- Average number of fastens per fuel cell: **1,200**
- Average number of fastens per battery charge: **3,300**
- Average battery charge time: **2** hours
- Fastener type: Length – **1/2" to 1 1/2",** Diameter – **.100" to .109"**

	Item No.	Description	Box	Case
	PT13G	**.106"** Shank Dia., **1/2"** shank length collated pin w/ fuel cell	1000	5000
	PT19G	**.106"** Shank Dia., **3/4"** shank length collated pin w/ fuel cell	1000	5000
	PT25G	**.106"** Shank Dia., **1"** shank length collated pin w/ fuel cell	1000	5000
	PT38G	**.106"** Shank Dia., **1-1/2"** shank length collated pin w/ fuel cell	1000	5000
	PT12SG	**.102"/.120"** step shank, **1/2"** shank length collated pin w/ fuel cell	1000	5000
	PT34SG	**.102"/.120"** step shank, **3/4"** shank length collated pin w/ fuel cell	1000	5000
	PT100SG	**.102"/.120"** step shank, **1"** shank length collated pin w/ fuel cell	1000	5000
	PT114SG	**.102"/.120"** step shank, **1-1/4"** shank length collated pin w/ fuel cell	1000	5000
	All collated pins also fits most Powers®, Ramset®, Simpson® and other gas tools. Box includes **1000** pins + **1** fuel cell.			

Accessories	Item No.	Description	Quantity
	FC6	6" fuel cell	10pcs/ box, 100pcs/ case

Accessories	Item No.	Description	Quantity
	FC6(2)	Blister packed 6" fuel cell	2pcs/ blister package, 12pcs/ box

Nitro Ninja Ceiling Fastening Tools

PATENT PENDING

Overhead Hanging Applications

Overhead Hanging Applications with Adjustable Ninja Pole

Floor Applications

Wall Applications



Miscellaneous Hardware Applications

"Excellent holding values in hard concrete"

Special Features

- ***No Lead***
- ***Low Noise***
- ***Low Failure Rate***
- No Piston – No Kickback
- Low Maintenance – No Direct Impact Components
- Narrow Profile
- Excellent Guidance Of The Drive Pin
- Overhead (Ceilings) – Floor – Wall
- High Pressure Concrete – Post Tension Slabs
- Pre-tied Wire – Straight Pins - Angle Clips – Threaded Rod Clips – Conduit Clamps – Zip Tie Clips

NN-178

New Upgrade! No Residue Buid-up!

NN-150

Nitro Ninja Kit

Item No.	Description	Quantity
NN-150	Nitro Ninja Tool	1
NN150-0b	7mm Extension Ring	1
NN-150-1a	Spall Guard (Round)	1
NN-150-1b	Spall Guard for Angle Clip	1
NN-150-19	Handle	1
NN-150-20	Barrel Guard	1
NN-150-1	Extension Pole	1

.300" Dia. Head, .157" Dia. Shank Nitro Ninja Drive Pins:

Plain Pins:

Item No.	Description	Jar/ Box	Case
PD157-12NB	.157 dia. shank, 1/2" shank lgth nitro pin (black)	500	-
PD157-34NY	.157 dia. shank, 3/4" shank lgth nitro pin (yellow)	100	1000
PD157-34NB	.157 dia. shank, 3/4" shank lgth nitro pin (black)	500	5000
PD157-100NB	.157 dia. shank, 1" shank lgth nitro pin (black)	500	5000
PD157-114NB	.157 dia. shank, 1-1/4" shank lgth nitro pin (black)	500	5000
PD157-112NB	.157 dia. shank, 1-1/2" shank lgth nitro pin (black)	500	5000



Actual Embedment Pins:

Item No.	Description	Jar	Case
PD157-12AENB	.157 dia. shank, 1/2" shank lgth actual embedment nitro pin (black)	500	5000
PD157-34AENY	.157 dia. shank, 3/4" shank lgth actual embedment nitro pin (yellow)	500	5000
PD157-34AENB	.157 dia. shank, 3/4" shank lgth actual embedment nitro pin (black)	500	5000
PD157-100AENB	.157 dia. shank, 1" shank lgth actual embedment nitro pin (black)	500	5000
PD157-114AENB	.157 dia. shank, 1-1/4" shank lgth actual embedment nitro pin (black)	500	5000
PD157-112AENB	.157 dia. shank, 1-1/2" shank lgth actual embedment nitro pin (black)	500	5000



Angle Clip Pins:

Item No.	Description	Jar	Case
PD157-78HNCNB	.157 dia. shank, 7/8" shank lgth top hat nitro pin (black) w/NJ clip	100	1000
PD157-100HNCNB	.157 dia. shank, 1" shank lgth top hat nitro pin (black) w/NJ clip	100	1000
PD157-114HNCNB	.157 dia. shank, 1-1/4" shank lgth top hat nitro pin (black) w/NJ clip	100	1000

Actual Embedment Angle Clip Pins:

Item No.	Description	Jar	Case
PD157-78AEHNCNB	.157 dia. shank, 7/8" shank lgth top hat actual embedment nitro pin (black) w/NJ clip	100	1000
PD157-100AEHNCNB	.157 dia. shank, 1" shank lgth top hat actual embedment nitro pin (black) w/NJ clip	100	1000
PD157-114AEHNCNB	.157 dia. shank, 1-1/4" shank lgth top hat actual embedment nitro pin (black) w/NJ clip	100	1000

Conduit Clip Pins:

Item No.	Description	Jar	Case
PD157-100NB/CC38	3/8" conduit clip w/ .157" dia. shank, 1" nitro pin (black)	100	1000
PD157-100NB/CC50	1/2" conduit clip w/ .157" dia. shank, 1" nitro pin (black)	100	1000
PD157-100NB/CC75	3/4" conduit clip w/ .157" dia. shank, 1" nitro pin (black)	100	600
PD157-100NB/CC100	1" conduit clip w/ .157" dia. shank, 1" nitro pin (black)	100	600



Z Clip Pins:

Item No.	Description	Jar	Case
PD157-100NB/ZC25	1/4" thread Z clip w/.157" dia. shank, 1" nitro pin(black)	100	1000

Pretied Wires with Nitro Ninja Pins:

Item No.	Description
Wxx+4/157-78HNCNB	NJ clip w/.157" dia. shank, 7/8" shank lgth top hat nitro pin prettied 12 gauge wire of any length
Wxx+4/157-100HNCNB	NJ clip w/.157" dia. shank, 1" shank lgth top hat nitro pin prettied 12 gauge wire of any length
Wxx+4/157-114HNCNB	NJ clip w/.157" dia. shank, 1-1/4" shank lgth top hat nitro pin prettied 12 gauge wire of any length

BP-27C .27cal Powder Actuated Tool

Overhead Hanging Applications

Features and Benefits

- Slim tool. Fits in tight spaces.
- Automatic piston return.
- Easy to remove retention collar for cleaning.
- For use in Acoustical, Electrical and Mechanical overhead applications.
- Compatible with Bluepoint Ninja Pole System.
- Uses standard .27 cal. 10 shot strip loads.

Technical Data

Dimensions:	13-3/4" x 6" x 1-1/2"
Weight:	3.0lb
Fastener length:	1/2" - 1-1/4"
Load Type:	.27cal. (6.8 x 11mm) 10 strip loads
Power Level:	Brown/2, Green/3, Yellow/4, Red/5

Loads

.27cal long strip loads

Fasteners & Assemblies

.300" Dia. Head (PD series), .157" & .145" Dia. Shank Drive Pins and Assemblies

8mm Head (DN series), .145" Dia. Shank Drive Pins and Assemblies

Ninja Adjustable Multi-function Ceiling Poles

Item No.	Pole Type	Description	Adjustable length
NPM48	**Heavy Duty *MAGNESIUM* Pole**	• With non slip insulated rubber grip • Directly comparable with all competitors tools and adapters • Connect two or more poles using the Ninja stack system	4' to 8'
NPM412			4' to 12'
NPM612			6' to 12'
NPM618			6' to 18'
NPM824			8' to 24'
NP48	**Standard *ALUMINUM* Pole**		4' to 8'
NP412			4' to 12'
NP612			6' to 12'
NP618			6' to 18'
NP824			8' to 24'

Ninja Ceiling Fastening Tool

New

Features and Benefits

- Low noise even in fractured concrete.
- Heavy duty shank for higher holding strengths.
- Lightest ceiling tool weighing under 3-1/2 lbs.
- No recoil, reduces operator fatigue.
- No piston to wear or break.
- Non-slip rubber grip makes it comfortable and non-conductive.
- Tool & pin ensure straight driving penetration into work surface.
- Unique power venting system prevents overdrive.
- Slim profile tool design allows for threaded rod, pencil rod and wire to hang straight down while fastening in tight areas.
- Uses standard PATMI .22 cal straight wall powder loads.
- Total weight of 12' pole and Ninja tool only 7-1/2 lbs.

PATENT PENDING

Technical Data

Items	Description			Holding Values Allowable load / Ultimate load			
	Ninja drive pin with angle clip and washer			Light weight with decking 3000 PSI		4000 PSI	
	Item#	Shank Dia.	Shank length	Tension (lbs)	Shear (lbs)	Tension (lbs)	Shear (lbs)
	NC100 NC125S	.157" .157"/.167"	1" 1-1/4"	175/957 157/861	372/1860 352/1767	329/1644 296/1479	377/1885 358/1790

Ninja Ceiling Tool

PATENT PENDING

	Item No.	Description
	NJ-100	**.22cal.** Single shot Ninja ceiling tool for **1"** NJ pin
	NJ-125	**.22cal.** Single shot Ninja ceiling for **1-1/4"** NJ pin

Ninja Pins and Clips

	Item No.	Description	Box	Case
PATENT PENDING	NC100G	**.307"** dia head, slim groove shank NJ pin w/NJ clip	100	1000
	NC100	**.307"** (7.8mm) dia head, smooth shank NJ pin w/NJ clip	100	1000
	NC125S	**.307"** (7.8mm) dia head, step shank NJ pin w/NJ clip	100	1000
PATENTED	N100RH2	**.307"** (7.8mm) dia head, **1"** shank length NJ pin w/ **1/4"-20 & 3/8"-16** all thread rod hanger clip	100	500
	N125SRH2	**.307"** (7.8mm) dia head, **1-1/4"** step shank NJ pin with **1/4"-20 & 3/8"-16** all thread rod hanger clip	100	500
PATENT PENDING	N100G	**.307"** (7.8mm) dia head, **.157"** (4mm) dia. shank, **1"** slim groove shank length NJ pin	100	1000
	N100	**.307"** (7.8mm) dia head, smooth shank NJ pin	100	1000
	N125S	**.307"** (7.8mm) dia head, step shank NJ pin	100	1000

Ninja Power Load

	Item No.	Description	Size	Power Level	Box	Case
	22SL6B	**.22cal** straight wall single shot loads for the Ninja ceiling tool	**5.6*15**	6	100	1000
	22SL5B			5	100	1000
	22SL4B			4	100	1000
	22SL3B			3	100	1000

NINJA ACOUSTIC POLE ADAPTER SYSTEMS

All adapters have 3/4"-16 SAE threads

One Pole Does It All

New

Features and Benefits of NINJA Poles & Standard Aluminum Poles:

- Stackable
- Fits Viper™ (I, II, III) , Sniper Nitroset™ and Ninja forced entry ceiling tool systems
- Fits Viper™ IV with an adapter
- Most trigger operated PAT tools can be utilized with push actuated saddle
- Multiple attachment configurations on the same pole makes you and your crew more productive

Light Weight Heavy Duty Multi-function Ceiling Poles

Item No.	Description	Adjustable length
PM412	• ***Light Weight*** Heavy duty adjustable multifunction ceiling pole (***MAGNESIUM***) w/ rubber grip	4' to 12'
PM612		6' to 12'
PM618		6' to 18'

Ninja Adjustable Multi-function Ceiling Poles

PATENTED

Item No.	Pole Type	Description	Adjustable length
NPM48	**Heavy Duty *MAGNESIUM* Pole**	• With non slip insulated rubber grip • Directly comparable with all competitors tools and adapters • Connect two or more poles using the Ninja stack system	4' to 8'
NPM412			4' to 12'
NPM612			6' to 12'
NPM618			6' to 18'
NPM824			8' to 24'
NP48	**Standard *ALUMINUM* Pole**		4' to 8'
NP412			4' to 12'
NP612			6' to 12'
NP618			6' to 18'
NP824			8' to 24'

Standard Adjustable Multi-function Ceiling Poles

Item No.	Description	Adjustable length
P412	• ***Standard Aluminum*** Adjustable Ceiling Pole • Directly comparable with all competitors tools and adapters • Connect two or more poles using the Ninja stack system	4' to 12'
P612		6' to 12'
P618		6' to 18'

Features and Benefits of Lag-Pro Aluminum Poles:

- Used to install threaded rods, ceiling wires, jack chain, pretied wires etc. to a variety of ceiling structures.

Lag-Pro Aluminum Poles

Item No.	Description	Adjustable length
P412L	• ***Lag-Pro Aluminum*** Adjustable Ceiling Pole • Directly comparable with all competitors tools and adapters	4' to 12'
P612L		6' to 12'
P618L		6' to 18'

Acoustic Pole System Adapters

All adapters have 3/4"-16 SAE threads

Adapter Kits

Item No.	Description	Include	Qty.
NPAK-1	**Ninja Adapter Kit 1 includes the following:** • Tie wire wedge anchor installer • Eye lag head • Pretied wire head • Hex drive adapter • Lock pin • Base attachment, 3/8'' hex drive • Plastic case	 NPDA1 NPA1 NPA2 NPA3 NPLP NPBA2 NPAK-1C	 1 1 1 1 1 1 1

Item No.	Description	Include	Qty.
NPAK-2	**Ninja Adapter Kit 2 includes the following:** • Tie wire wedge anchor Installer • Eye lag head • Pretied wire head • Hex drive adapter • Connection adapter for Viper 4™ • Drill chuck adapter • Lock pin • Base attachment, 3/8'' hex drive • Plastic case	 NPDA1 NPA1 NPA2 NPA3 NPA4 NPA9 NPLP NPBA2 NPAK-2C	 2 2 2 2 1 1 4 3 1

NPA5

NPAFT

Adapters

Item No.	Description
NPA1	Eye lag head
NPA2	Pre-tied wire head adapter
NPA3	Hex drive adapter
NPA4	Connection adapter used with **Viper 4™** PAT Tool
NPBA2	Base attachment, **3/8"** hex drive
NPPCI	Purlin clip installation tool

Adapters

Item No.	Description
NPDA1	Tie Wire Anchor Installer
NPLP	Lock Pin
NPA9	Drill Chuck Adapter
NPA5	PAT Pole Saddle Head **Fits to:** • **Blue Point™** BP-301, BP-35 • **Hilti™** DX35, DX350, DX2 • **Simpson™** PT-27 • **Ramset™** Cobroa, R25 • **Powers™** P3500, PA3500, P35s, P3600
NPAFT	PAT Pole Saddle Head 2 **Fits to:** • **Blue Point™** BP-301C, BP-303A, BP-361 • **Hilti™** DX35, DX350, DX351,DX2 • **Simpson™** PT-27 • **Ramset™** Cobroa, R25 • **Powers™** P3500, PA3500, P35s, P3600

Features and Benefits

- Quick and easy installation from one side of the workpiece
- Available in Dome or Countersunk Head
- Colored Head match to Pantone, RAL or sample color upon request



TÜV CERT ISO9001:2008

Item No.	Description	Diameter	Rivet Length	Bag	Box	Case
AA42WBULK	5052 Aluminum alloy Rivets with aluminum mandrels and WHITE colored Head	1/8"	0.275"	-	-	10000
AA42W1000			0.275"	-	1000	20000
AA42W100			0.275"	100	1000	12000
AA44WBULK			0.4"	-	-	10000
AA44W1000			0.4"	-	1000	20000
AA42B1000	5052 Aluminum alloy Rivets with aluminum mandrels and BLACK colored Head		0.275"	-	-	10000
AA42BBULK			0.275"	-	1000	20000
AA44BBULK			0.4"	-	-	10000
AA44B1000			0.4"	-	1000	20000

Technical Data

AA 5052 Aluminium rivets with aluminium alloy IFI 114 Grade11

RIVET CODE	RIVET DIAMETER D	HOLE SIZE (inch)	RIVET LENGTH L (max)	GRIP RANGE (inch)	HEAD DIAMETER H (inch)	HEAD THICKNESS T (inch)	STANDARD STRENGTH Lbs (min.) SHEAR	STANDARD STRENGTH Lbs (min.) TENSILE
32 34 36	3/32 2.4mm	0.097 ~ 0.100	0.250 0.375 0.500	0.020 - 0.125 0.126 - 0.250 0.251 - 0.375	0.178 ~ 0.198	0.032	70	80
41 42 43 44 45 46 48 410 412	1/8 3.2mm	0.129 ~ 0.133	0.212 0.275 0.337 0.400 0.462 0.525 0.650 0.775 0.901	0.020 - 0.062 0.063 - 0.125 0.126 - 0.187 0.188 - 0.250 0.251 - 0.312 0.313 - 0.375 0.376 - 0.500 0.501 - 0.625 0.626 - 0.750	0.238 ~ 0.262	0.040	120	150
52 53 54 55 56 58 510 512	5/32 4.0mm	0.160 ~ 0.164	0.300 0.362 0.425 0.487 0.550 0.675 0.800 0.925	0.020 - 0.125 0.126 - 0.187 0.188 - 0.250 0.251 - 0.312 0.251 - 0.375 0.376 - 0.500 0.501 - 0.625 0.626 - 0.750	0.296 ~ 0.328	0.050	190	230
62 63 64 65 66 68 610 612 614 616	3/16 4.8mm	0.192 ~ 0.196	0.325 0.387 0.450 0.513 0.575 0.700 0.825 0.950 1.075 1.200	0.020 - 0.125 0.126 - 0.187 0.188 - 0.250 0.251 - 0.312 0.251 - 0.375 0.376 - 0.500 0.501 - 0.625 0.626 - 0.750 0.751 - 0.875 0.876 - 1.000	0.356 ~ 0.394	0.060	260	320
82 84 86 88 810 812 814 816	1/4 6.4mm	0.257 ~ 0.261	0.375 0.500 0.625 0.750 0.875 1.000 1.125 1.250	0.020 - 0.125 0.126 - 0.250 0.251 - 0.375 0.376 - 0.500 0.501 - 0.625 0.626 - 0.750 0.751 - 0.875 0.876 - 1.000	0.475 ~ 0.525	0.080	460	560

▲ **HR-702**
Hand Riviter (In 2 jaws)

▲ **HR-705**
Hand Riviter (In 2 jaws)
(up to 3/16" for all material)

▲ **HR-708**
Hand Riveter (In 3 jaws)
(up to 3/16" for all material)

▲ **PPK HD Punch Plier**

▲ **Available on Request**

New

Exclusive MFR of both PAT and Gas tools for insulation fasteners

Tools

BP-361N

BP-303N

GT-120N

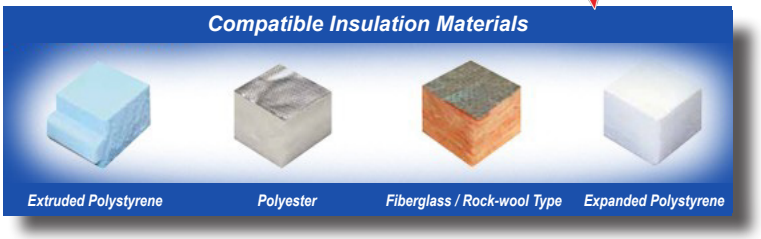

Powder Loads:

Item No.	Color	Power Level
27LS11L6	Black	6
27LS11L5	Red	5
27LS11L4	Yellow	4
27LS11L3	Green	3



.27 cal. Low Velocity Insulation Loads

IF60-125-158S



IF60-200-200S

IF60-400-200S



Insulation Washers:

	Item No.	Description	Insulation Thickness	Penetration Length	Bag	Case
For CONCRETE	IF60-125-158S	**.300"** Dia. head, **.145"-.157"** step shank pin with **60mm** dia. insulation	1"-1 1/4"	1"	50	1000
	IF60-150-158S		1 1/2"	1"	50	
	IF60-200-200S		2"	1"	50	900
	IF60-300-200S		3"	1"	50	600
	IF60-400-200S		4"	1"	50	500
	IF60-500-200S		5"	1"	25	300
	IF60-600-200S		6"	1"	25	300
For METAL	IF60-125-158K	**.300"** Dia. head, **.157"** knurled shank pin with **60mm** dia. insulation washer(For metal studs, light metal frame etc.)	1"-1 1/4"	1"	50	1000
	IF60-150-158K		1 1/2"	1"	50	
	IF60-200-200K		2"	1"	50	900
	IF60-300-200K		3"	1"	50	600
	IF60-400-200K		4"	1"	50	500
	IF60-500-200K		5"	1"	25	400
	IF60-600-200K		6"	1"	25	300

PDIW36-38F-10  ** Metal Washer*

PIWP112G ** Gray Plastic Washer*

PIWP112W ** White Plastic Washer*

▲

Innovative Insulation Washers

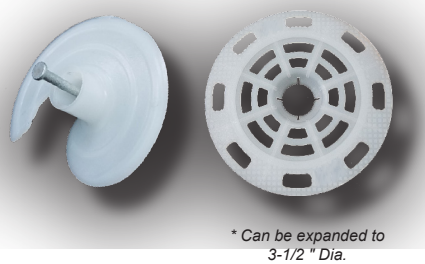

** Can be expanded to 3-1/2 " Dia.*

Spiral Hidden Type

Slip On Diameter Extension Washer

Membrane Washer Pins:

Item No.	Description	Shank Dia.	Shank Length	Box	Case
PDIW36-38F10	**.300"** dia. head, **.145"** dia. shank drive pin w/ **36mm** dia. metal round insulation washer	.145"	1-1/2"	100	1000
PDIW36-51F10		.145"	2"	50	500
PDIW36-63F10		.145"	2-1/2"	50	500
PDIW36-76F10		.145"	3"	50	500
PIWP112G	**.300"** dia. head, **.145"** dia. shank drive pin w/ **36mm** dia. plastic round insulation washer	.145"	1-1/2"	100	1000
PIWP112W		.145"	1-1/2"	100	1000
PIWP212W		.145"	2-1/2"	100	1000

▲ **Available on Request**

Pretied Ceiling Wire:

- ICC-ES ESR-1530 certified pins
- Meets or exceeds wire standards ASTM A641-92
- All wires are tied with the hospital wrap
- Tie requirement to ensure maximum holding power as dictated by building code
- Wire gauge:8 thru 12 gauge
- Length:2', 4', 6', 8', 10', 12', 14', 16', 18', 20' available
- Custom lengths also available
- Multiple wire termination options(see below)
- Wire can be purchased by:
  - a) Container for maximum savings
  - b) Bundles of 100pcs capped and wrapped securely
  - c) Master bundles of 20-100pc bundles
  - **d) Steel crates that are stackable**

Technical Data - 12 gauge wire		
Diameter	Tensile Range	Zinc Thick-ness
0.105"	75ksi max	≥25g/m2

Straight Cut Wires:

Coiled Wire:



Hospital Tied

Small bundle
(Include 100pcs)

8 & 9 Gauge Tied

12 Gauge Double Tied

Master Bundle
(Include 20 small bdls)

Steel Crate Quantity

Bundles / Steel crate	
Wire length 4"	160 bdls
Wire length 6"	140 bdls
Wire length 8"	120 bdls

Wire Attachment Options:

Custom tying to order.

Electric EZ wire tie machine:

	Part No.	Description	Box	Case
	TWM1	Electric EZ wire tie machine/110V	1	1
	TWM2	Electric EZ wire tie machine/ 110V (Heavy duty, wire size up to 9 gauge)	1	1

Wire Attachment Options

	Product	Part No.	Description	Box	Case
※		EL300W	**3"** wood eye lag screw 'Plain'	100	1000
※		EL400W	**4"** wood eye lag screw 'Plain'	100	1000
※		EL500W	**5"** wood eye lag screw 'Plain'	100	1000
※		EL75SD	**2"** overall length, **~1/2"** thread length, **3/4"** from collar to self drill point. Used for **16** to **22** gauge sheet metal	100	1000
▲ ※	**5/16" BIG HOLE**	EL75BSD	**2"** overall length, **~1/2"** thread length, **3/4"** from collar to self drill point, **5/16" Eye.** Used for **16** to **22** gauge sheet metal	100	1000
※		EL150SP	**2-3/4"** overall length, **~1-1/2"** thread length	100	1000
※		EL200SD	**3-1/4"** overall length,**~1-3/4"** threaded length, **2"** from collar to drill point. Used for **16** to **22** gauge sheet metal	100	1000
		EL100DSD	**2-1/4"** overall length, **1"** from collar to drill point, **Deep Drilling** eye lag screw, **Blue Ruspert finish. Extra Wide tool tip** allows it to be used for up to **1/4"** thick structural steel	100	1000
		TWA14214	**1/4" x 2-1/4"** Tie wire wedge anchor	100	1000
		TWA14218	**1/4" x 2-1/8"** Tie wire anchor	100	1000
▲		TWSA14214	**1/4" x 2-1/4"** Tie wire split drive anchor	100	1000
		HBC25	Hammer-on beam clamp (**1/8" - 1/4"**)	100	1000
		HBC50	Hammer-on beam clamp (**5/16" -1/2"**)	100	1000
		PCZ25	Z-Purlin clip (**1/8" -1/4"**)	100	1000
		PC25	C-Purlin clip (**1/8" - 1/4"**)	100	1000
		AC90	**90** degree angle clip	100	1000
		AB90	**12** gauge heavy duty clip, **90** degree	100	1000
		SP45	**12** gauge heavy duty clip, **45** degree	100	1000

▲ **Available on Request**

※ **Bright Zinc Plating Available on Request**

Toggle Bolts

Product	Item No.	Description	Weight Kg./Case	Package
	TBA14414	**1/4"-20 * 4-1/4"** zinc plated toggle bolt, with **1-1/2"** metal washer assembled	4.2	**100** pcs/box, **6** boxes/carton
	TBSA14500	**1/4"-20 * 5"** zinc plated toggle bolt, with **1-1/2"** metal washer & spring assembled	4.9	**100** pcs/box, **6** boxes/carton

Wood Screws

Product	Item No.	Description
※	EL300W	**3"** wood eye lag screw 'Plain'
	EL400W	**4"** wood eye lag screw 'Plain'
	EL500W	**5"** wood eye lag screw 'Plain'

※ **Bright Zinc Plating Available on Request**

Eye Lag Screws

Product	Item No.	Description
※	EL75SD	**2"** overall length, **~1/2"** thread length, **3/4"** from collar to self drill point. Used for **16** to **22** gauge sheet metal
▲ ※ **5/16" BIG HOLE**	EL75BSD	**2"** overall length, **~1/2"** thread length, **3/4"** from collar to self drill point, **5/16" Eye.** Used for **16** to **22** gauge sheet metal
※	EL150SP	**2-3/4"** overall length, **~1-1/2"** thread length
※	EL200SD	**3-1/4"** overall length,**~1-3/4"** threaded length, **2"** from collar to drill point. Used for **16** to **22** gauge sheet metal
	EL100DSD	**2-1/4"** overall length, **1"** from collar to drill point, **Deep Drilling** eye lag screw, **Blue Ruspert finish. Extra Wide tool tip** enables it to be used for up to **1/4"** thick structural steel

※ **Bright Zinc Plating Available on Request**

Super Screw for Concrete, Wood and Steel

Product	Item No.	Description
	2520RC150SP	**1/4-20** rod coupling, point to collar **1-1/2"** lengh, heat treated screw, non-detachable hex coupling
	3816RC75SD	**3/8-16** rod coupling, point to collar **1-1/2"** lengh, heat treated screw, non-detachable hex coupling
	2520RC75SD	**1/4-20** rod coupling, point to collar **3/4"** lengh self-drilling, heat treated screw, **16 to 22ga.** Sheet metal, non-detachable hex coupling
	3816RC200SP	**3/8-16** rod coupling with **2"** sharp point screw,

▲ **Available on Request**

Attachments

	Item No.	Description
	BR10-75	Bridle Ring **10-24 X 3/4"**
	BR10-200	Bridle Ring **10-24 X 2"**
	BR25-125	Bridle Ring **1/4"-20 X 1-1/4"**
	BR25-200	Bridle Ring **1/4"-20 X 2"**

c UL us LISTED
(CONDUIT AND CABLE HARDWARE)
E472978

	Part No.	Description
	PC25	C-Purlin clip **1/8"-1/4"**
	PCZ25	Z-Purlin clip **1/8"-1/4"**
	HBC25	Hammer-on beam clip **1/8"-1/4"**
	HBC50	Hammer-on beam clip **5/16"-1/4"**
	BC50	Beam clamp w/ two **1/4"-20** holes, for flanges up to **1/2"** thick
	BCS50	Beam Clamp (Spring steel), for flanges up to **1/2"** thick
	PC25-EC25	**1/8"-1/4"** Purlin Clip w/ **1/4"-20** Eye Coupling
	PC25-EC38	**1/8"-1/4"** Purlin Clip w/ **3/8"-16** Eye Coupling
	PCZ25-EC25	**1/8"-1/4"** Z-Purlin Clip w/ **1/4"-20** Eye Coupling
	HBC25-EC25	**1/8"-1/4"** Beam Clip w/ **1/4"-20** Eye Coupling
	HBC50-EC25	**5/16"-1/2"** Beam Clip w/ **1/4"-20** Eye Coupling
	AC90	**90** degree angle clip

	Part No.	Description
	ZC25-P32	Z clip (w/ **1/4"** threaded hole) w/ **.145"** shank dia., **1-1/4"** shank length pin
	ZC25-P157-100	Z clip (w/ **1/4"** threaded hole) w/ **.157"** shank dia., **1"** shank length pin
	ZC25	Z clip (w/ **1/4"** threaded hole)
	EC25-AC90	Eye Coupling (**1/4"-20**) with **90** degree angle clip
	EC25-ACP32	Eye Coupling (**1/4"-20**) with **90** degree angle clip pin (**.145** shank dia., **1-1/4"** shank length)
	RH3 PATENTED	Dual thread rod hanger (**1/4"-20 & 3/8"-16**)
	N100RH2	Dual thead rod hanger (**1/4"-20 & 3/8"-16**) w/ **1"** length shank NJ pin
	N125SRH2	Dual thead rod hanger (**1/4"-20 & 3/8"-16**) w/ **1-1/4"** shank lgth NJ pin
	PD157-100RH1	Dual thead rod hanger (**1/4"-20 & 3/8"-16**) w/ **.157"** shank, **1"** length pin
	PD157-125RH1	Dual thread rod hanger (**1/4"-20 & 3/8"-16**) w/ **.157"** shank dia., **1-1/4"** shank length pin
	EC25	Eye coupling **1/4"-20** ▲
	EC38	Eye coupling **3/8"-16** ▲
	BW25	Bat-Wing clip for **1/4"** rod and **12** gauge wire

▲ **Available on Request**

			Multi-Func-tion Clip for **#12 - 1/4"**	Purlin Clip	Z-Purlin Clip	Hammer On Beam Clip **1/8" - 1/4"** Flange	Hammer On Beam Clip **5/16" - 1/2"** Flange	Beam Clip **Up to 1/2"**	Beam Clamp **Up to 1/2"**	Beam Clamp Rotates **360°**	Angle Clip & **1-1/4"** Pin	Angle Clip	**1/4"-20** Eye Coupling
	Size	**Part No.**	**Part No.**	**Part No.**	**Part No.**	**Part No.**	**Part No.**	**Part No.**	**Part No.**	**Part No.**	**Part No.**	**Part No.**	**Part No.**
	3/4"	JH75	JH75-BW25	JH75-PC	JH75-PCZ	JH75-HBC25	JH75-HBC50	JH75-BCS	JH75-BC	JH75-BCAC	JH75-PDAC	JH75-AC	JH75-EC
	1-5/16"	JH131	JH131-BW25	JH131-PC	JH131-PCZ	JH131-HBC25	JH131-HBC50	JH131-BCS	JH131-BC	JH131-BCAC	JH131-PDAC	JH131-AC	JH131-EC
	2"	JH200	JH200-BW25	JH200-PC	JH200-PCZ	JH200-HBC25	JH200-HBC50	JH200-BCS	JH200-BC	JH200-BCAC	JH200-PDAC	JH200-AC	JH200-EC
	4"	JH400	JH400-BW25	JH400-PC	JH400-PCZ	JH400-HBC25	JH400-HBC50	JH400-BCS	JH400-BC	JH400-BCAC	JH400-PDAC	JH400-AC	JH400-EC
	Size	**Part No.**	**Part No.**	**Part No.**	**Part No.**	**Part No.**	**Part No.**	**Part No.**	**Part No.**	**Part No.**	**Part No.**	**Part No.**	**Part No.**
▲	1"	PH100	PH100-BW25	PH100-PC	PH100-PCZ	PH100-HBC25	PH100-HBC50	PH100-BCS	PH100-BC	PH100-BCAC	PH100-PDAC	PH100-AC	PH100-EC
	2"	PH200	PH200-BW25	PH200-PC	PH200-PCZ	PH200-HBC25	PH200-HBC50	PH200-BCS	PH200-BC	PH200-BCAC	PH200-PDAC	PH200-AC	PH200-EC
	3"	PH300	PH300-BW25	PH300-PC	PH300-PCZ	PH300-HBC25	PH300-HBC50	PH300-BCS	PH300-BC	PH300-BCAC	PH300-PDAC	PH300-AC	PH300-EC

JH400 **JH200** **JH131** **JH75**

PH300 **PH200** **PH100**

▲ **Available on Request**

Conduit Clip

- Conduit clip, 1/2" to 3/4" Max load Vertical 100lbs. Horizontal 25lbs.

Part No.	Description	Box	Case
CC50	**1/2"** Conduit clamp	100	1000
CC75	**3/4"** Conduit clamp	100	1000
CC100	**1"** Conduit clamp	100	1000
CC125	**1-1/4"** Conduit clamp	100	1000
CC150	**1-1/2"** Conduit clamp	100	1000
CC200	**2"** Conduit clamp	100	1000

Conduit Assembly

- Hammer on flange
- Conduit clip bolt close for guaranteed closing
- Conduit size: 1/2" to 3/4"

Part No.	Description	Box	Case
CC50-HBC25	Hammer on flange conduit clip **1/2" to 3/4"** steel	100	1000
CC50-BC50	Beam clamp with conduit clip	100	1000

Split Drive Anchor

- One-piece, vibration resistant anchor
- Available in flat or mushroom head design
- Available in various sizes for 3/16", 1/4", 3/8" and 1/2" drills diameter

Part No.	Description	Box	Case
SDA14112	**1/4" x 1-1/2"** split drive, flat head	100	1000
SDA14200	**1/4" x 2"** split drive, flat head	100	1000
SDA14214	**1/4" x 2-1/4"** split drive, flat head	100	1000
SDA14212	**1/4" x 2-1/2"** split drive, flat head	100	1000
SDA14300	**1/4" x 3"** split drive, flat head	100	1000

Bridle Ring

- Available in sizes from 3/4" to 2"

Part No.	Description	Box	Case
BR10-75	**10-24 x 3/4"** Bridle ring	100	1000
BR10-200	**10-24 x 2"** Bridle ring	100	1000
BR25-125	**1/4"-20 x 1-1/4"** Bridle ring	100	1000
BR25-200	**1/4"-20 x 2"** Bridle ring	100	1000

c UL us LISTED (CONDUIT AND CABLE HARDWARE) E472978

Steel Spring Cable Conduit Clip

- Available sizes 3/8" to 3/4"

Part No.	Description	Box	Case
CC3850	**3/8" - 1/2"** Conduit clips **#12-1/4"**	100	1000
CC5075	**1/2" - 3/4"** Conduit clips **#12-1/4"**	100	1000
CC75100	**3/4" - 1"** Conduit clips **#12-1/4"**	100	1000

Dual-Thread Rod Hanger

- Good for both sizes 1/4"-20 and 3/8"-16 threaded rods

New

PATENTED



Part No.	Description	Box	Case
RH3	Dual thread rod hanger (**1/4"-20 & 3/8"-16**)	100	500

c UL us LISTED (CONDUIT AND CABLE HARDWARE) E472978

▲ **Available on Request**

Conduit Clip w/ Pin

For use with powder actuated tools
Clip sizes from 1/2" to 1"

Part No.	Shank Lgth	Description	Box	Case
CC50-P25	1"	Conduit clip (**1/2"**) w/ **.300"** head, **.145"** shank dia. pin	100	1000
CC50-P32	1-1/4"		100	1000
CC75-P25	1"	Conduit clip (**3/4"**) w/ **.300"** head, **.145"** shank dia. pin	50	500
CC75-P32	1-1/4"		50	500
CC100-P25	1"	Conduit clip (**1"**) w/ **.300"** head, **.145"** shank dia. pin	50	500
CC100-P32	1-1/4"		50	500
CC25-P25	1"	Conduit clip (**1/4"**) w/ **.300"** head, **.145"** shank dia. pin	100	1000
CC38-P25	1"	Conduit clip (**3/8"**) w/ **.300"** head, **.145"** shank dia. pin	100	1000
CC75-DN25	1"	Conduit clip (**3/4"**) w/ **8mm** head, **3.7mm**(**.145"**) shank dia. pin	50	500

▲ Pencil Rod

Diameter 1/4"
Additional diameters and lengths available

Part No.	Description	Bundle	Pallet
PR25-4	Pencil rod **1/4" x 4'**	100	TBD
PR25-6	Pencil rod **1/4" x 6'**	100	TBD
PR25-8	Pencil rod **1/4" x 8'**	100	TBD
PR25-10	Pencil rod **1/4" x 10'**	100	TBD
PR25-12	Pencil rod **1/4" x 12'**	100	TBD

▲ Threaded Rod

All threaded rods, diameter 1/4'', 3/8", 1/2", 5/8", 3/4", 7/8", 1" are available
All lengths are available

Part No.	Description	Bundle	Pallet
TR25-4	Threaded rod/ All thread **1/4" x 4'**	100	TBD
TR25-6	Threaded rod/ All thread **1/4" x 6'**	100	TBD
TR25-8	Threaded rod/ All thread **1/4" x 8'**	100	TBD
TR25-10	Threaded rod/ All thread **1/4" x 10'**	100	TBD
TR25-12	Threaded rod/ All thread **1/4" x 12'**	100	TBD

▲ **Available on Request**

Concrete Screws

- Available in 1/4" and 3/16" diameter
- No insert required
- Removable fastener
- Can be used in pressure treated lumber
- Available in either Philips head or hex head length up to 6"

	Item No.	Description	Size	Box	Case
	CSF316114	Philips flat head concrete screw	3/16" x 1-1/4"	100	1000
	CSF316214		3/16" x 2-1/4"	100	1000
	CSF316334		3/16" x 3-3/4"	100	1000
	CSF14114		1/4" x 1-1/4"	100	1000
	CSF14134		1/4" x 1-3/4"	100	1000
	CSF14214		1/4" x 2-1/4"	100	1000
	CSF14234		1/4" x 2-3/4"	100	1000
	CSF14314		1/4" x 3-1/4"	100	1000
	CSF14334		1/4" x 3-3/4"	100	1000
	CSF14400		1/4" x 4"	100	1000
	CSH316114	5/16" Hex head	3/16" x 1-1/4"	100	1000
	CSH316214		3/16" x 2-1/4"	100	1000
	CSH316334		3/16" x 3-3/4"	100	1000
	CSH14114		1/4" x 1-1/4"	100	1000
	CSH14134		1/4" x 1-3/4"	100	1000
	CSH14214		1/4" x 2-1/4"	100	1000
	CSH14234		1/4" x 2-3/4"	100	1000
	CSH14314		1/4" x 3-1/4"	100	1000
	CSH14334		1/4" x 3-3/4"	100	1000
	CSH14400		1/4" x 4"	100	1000

Mechanical Anchors

Available in several designs for the best solution for your fastening requirements.

	Item No.	Description	Size	Box	Case
	SLA38178	Sleeve anchor hex nut	3/8" x 1-7/8"	50	500
	SLA38300		3/8" x 3"	50	400
	SLA12214		1/2" x 2-1/4"	25	250
	SLA12234		1/2" x 2-3/4"	25	250
	SLA12300		1/2" x 3"	25	200
	DIA1258200	Drop in anchor	1/2" x 5/8" x 2"	50	500
	DIA1258200T	Drop in anchor, w/ 1 tool/box	1/2" x 5/8" x 2"	50	500
	DIA38121916	Drop in anchor	3/8" x 1/2" x 1-9/16"	50	500
	DIA38121916T	Drop in anchor, w/ 1tool/box	3/8" x 1/2" x 1-9/16"	50	500
	TWA14214	Tie wire wedge anchor	1/4" x 2-1/4" (overall)	100	1000
	TWA14218		1/4" x 2-1/8" (overall)	100	1000
	TWSA14214	Tie wire spike anchor	1/4" x 2-1/4"	100	1000 ▲

▲ **Available on Request**

Mechanical Anchors

	Item No.	Description	Size	Box	Case
	WA38214	Wedge anchor	3/8" x 2-1/4"	50	500
	WA38234		3/8" x 2-3/4"	50	400
	WA38300		3/8" x 3"	50	400
	WA38312		3/8" x 3-1/2"	50	300
	WA38334		3/8" x 3-3/4"	50	300
	WA38500		3/8" x 5"	50	250
	WA38612		3/8" x 6-1/2"	50	250
	WA38800		3/8" x 8"	50	250
	WA12234		1/2" x 2-3/4"	25	200
	WA12334		1/2" x 3-3/4"	25	150
	WA12414		1/2" x 4-3/4	25	150
	WA12412		1/2" x 4-1/2"	25	150
	WA12512		1/2" x 5-1/2"	25	150
	WA12700		1/2" x 7"	25	150
	WA12812		1/2" x 8-1/2"	10	30
	WA121000		1/2" x 10"	10	30
	WA121200		1/2" x 12"	10	30
	WA58312		5/8" x 3-1/2"	10	100
	WA58412		5/8" x 4-1/2"	10	100
	WA58500		5/8" x 5"	10	100
	WA58600		5/8" x 6"	10	50
	WA58700		5/8" x 7"	10	30
	WA58812		5/8" x 8-1/2"	10	30
	WA581000		5/8" x 10"	10	30
	WA581200		5/8" x 12"	10	30
	WA34414		3/4" x 4-1/4"	10	60
	WA34434		3/4" x 4-3/4"	10	60
	WA34512		3/4" x 5-1/2'	10	50
	WA34614		3/4" x 6-1/4"	10	30
	WA34700		3/4" x 7"	10	30
	WA34812		3/4" x 8-1/2"	10	30
	WA341000		3/4" x 10"	10	30
	WA341200		3/4" x 12"	10	30
	NIZ1434	Zamac nail drive anchor	1/4" x 3/4"	100	1000
	NIZ31678		3/16" x 7/8"	100	1000
	NIZ14100		1/4" x 1"	100	1000
	NIZ14114		1/4" x 1-1/4"	100	1000
	NIZ14112		1/4" x 1-1/2"	100	1000
	NIZ14200		1/4" x 2"	100	1000
	NIZ14212		1/4" x 2-1/2"	100	1000
	NIZ14300		1/4" x 3"	100	1000
	NIP14100	Plastic nail in anchor	1/4" x 1"	100	1000
	NIP14114		1/4" x 1-1/4"	100	1000
	NIP14112		1/4" x 1-1/2"	100	1000
	NIP14200		1/4" x 2"	100	1000
	NIP14212		1/4" x 2-1/2"	100	1000

Masonry Drill

ISO
ANSI

Description

Shank: Cylindrical Shank, Reduced.
Precision: Squared tip for a better centering.
Long lasting: High grade carbide for a longer lasting drill bit.
Finishing: New anti-rust finishing.
Speed: Deeper grooves that improve the evacuation of dust and making more efficient the hammer drill.
Norms: ANSI - NF ISO 5468 - DIN 8039

Part No.	Type	Description	Box
DS183	STD	X´tra masonry drill bit zinc plated **1/8" x 3"**	10
DS5166	STD	X´tra masonry drill bit zinc plated **5/16" x 6"**	10
DS384	STD	X´tra masonry drill bit zinc plated **3/8" x 4"**	10
DS386	STD	X´tra masonry drill bit zinc plated **3/8" x 6"**	10
DS3812	STD	X´tra masonry drill bit zinc plated **3/8" x 12"**	10
DS126	STD	X´tra masonry drill bit zinc plated **1/2" x 6"**	10
DS1212	STD	X´tra masonry drill bit zinc plated **1/2" x 12"**	10

SDS plus premium

The DMAXX Advantage

- SDS+
- 2 Cutting edges
- 4 Lateral supports
- Tungsten Carbide
- Self-centering point
- Chiseling effect

SDS+

MADE IN FRANCE







Research and Development

More Material

Flex exerted in the lower section of a drill bit is the most likely destructive factor. The progressive core of the spiral adds material and increases the rigidity in this area which is subjected to extreme pressure

Anti-Blocking System

2 asymmetric cutting edges reduce the risk of blockage when in use on a particularly hard aggregate, or on rebar. The progressive core and the roundness of the flute allow optimal removal of dust and eliminates any risk of blocking due to dust accumulation

Heat Treatment

The hardness of concrete combined with the power of the drill unite to create compression. The heat treatment of the body allows the energy of the drill to be concentrated on the tungsten carbide tip (while absorbing shock waves).

Part No.	Description	Qty.
DX144	SDS plus premium 2 cutting edges **1/4" x 4"**	Each
DX146	SDS plus premium 2 cutting edges **1/4" x 6"**	Each
DX148	SDS plus premium 2 cutting edges **1/4" x 8"**	Each
DX386	SDS plus premium 2 cutting edges **3/8" x 6"**	Each
DX388	SDS plus premium 2 cutting edges **3/8" x 8"**	Each
DX3812	SDS plus premium 2 cutting edges **3/8" x 12"**	Each
DX128	SDS plus premium 2 cutting edges **1/2" x 8"**	Each
DX1212	SDS plus premium 2 cutting edges **1/2" x 12"**	Each
DX586	SDS plus premium 2 cutting edges **5/8" x 6"**	Each
DX588	SDS plus premium 2 cutting edges **5/8" x 8"**	Each
DX5812	SDS plus premium 2 cutting edges **5/8" x 12"**	Each

Part No.	Description	Qty.
QX381116	**3/8" X 1-1/16"** QMAX	Each
QX121316	**1/2" X 13/16"** QMAX	Each
QX1211116	**1/2" X 1-11/16"** QMAX	Each
QX581316	**5/8" X 1-3/16"** QMAX	Each
QX582116	**5/8" X 2-1/16"** QMAX	Each

Part No.	Description	Qty.
AXSP2SDS	Spline to SDS Adapters	Each
AXSDS2SDSP	SDSMAX to SDS PLUS Adapter	Each

Heavy Duty - Dump Carts

HDDC50

- Powder coated steel frame.
- Heavy duty Swivel Casters.
- In-line HD bearings.
- Seamless one-piece molded truck bodies.
- Easy to clean.
- Easily passes through commercial and residential doorways and onto elevators.
- Dumping can be done by one person.
- Inset wheels protect walls, fixtures.

"850 lb Capacity"

"1,250 lb Capacity"

HDDC100

1/2 Yard Dump Cart

Item No.	Description
HDDC50	**1/2** yard cart (complete kit/ no lid)
HDDC50-1	**1/2** yard lid
HDDC50-2	**1/2** yard rear steel wheel, a pair
HDDC50-3	**1/2** yard front swivel caster wheel, a pair
HDDC50-4	**1/2** yard powder coated steel frame
HDDC50-5	**1/2** yard dump cart tub
HDDC50-6	**1/2** yard Handle

Lid "optional"

1 Yard Dump Cart

Item No.	Description
HDDC100	**1** yard cart (complete kit/ no lid)
HDDC100-1	**1** yard lid
HDDC100-2	**1** yard rear steel wheel, a pair
HDDC100-3	**1** yard front swivel caster wheel, a pair
HDDC100-4	**1** yard powder coated steel frame
HDDC100-5	**1** yard dump cart tub
HDDC100-6	**1** yard Handle

Utility - Dump Carts

- Heavy duty Swivel Casters.
- In-line HD bearings.
- Seamless one-piece molded truck bodies.
- Easy to clean.
- Easily passes through commercial and residential doorways and onto elevators.
- Dumping can be done by one person.
- Inset wheels protect walls, fixtures.

DCUD50

"450 lb Capacity"

"850 lb Capacity"

DCUD100 ▲

1/2 Yard Utility Dump Cart

Item No.	Description
DCUD50	**1/2** yard utility cart (complete kit/ no lid)
HDDC50-1	**1/2** yard lid
DCUD50-2	**1/2** yard rear wheel, a pair
DCUD50-3	**1/2** yard front swivel caster wheel, a pair

Lid "optional"

1 Yard Utility Dump Cart

Item No.	Description
DCUD100	**1** yard utility cart (complete kit/ no lid)
HDDC100-1	**1** yard lid
DCUD100-2	**1** yard rear wheel, a pair
DCUD100-3	**1** yard front swivel caster wheel, a pair

▲ **Available on Request**

BLUEPOINT®
FASTENERS

Contact:

Kurt Johnson
(for direct orders)
Phone: 877-779-2583
E-mail: kurt@bpfasteners.com

Robin Landy
(West Region Manager)
Phone: 909-553-9200
E-mail: rlandy@bpfasteners.com

Chris Mackzum
(East Region Manager)
Phone: 909-214-8755
E-mail: chris@bpfasteners.com

James Honea
(South Region Manager)
Phone: 909-525-8840
E-mail: jhonea@bpfasteners.com

Alex Barrón
(International Sales Manager)
Phone: 909-214-8750
E-mail: alex@bpfasteners.com

14728 Yorba Court, Chino, CA 91710